



CAMSHAFT TIMING TAG


BC0202/BC0206

Engine: **NISSAN SR20DE(T) - S13 & S14/S15**

	INT	EXH
Advertised Duration:	272°	272°
Duration @ .050" at the lobe:	224°	224°
Valve Lift (inches):	.494"	.494"
Valve Lift (mm):	12.55	12.55
Valve Lash (inches):	.000"	.000"

Recommended Valve Spring: **BC1200**

For best results, install straight up at 0 intake / 0 exhaust and tune from there with adjustable cam sprockets if applicable.
Note: Timing figures below are correct at the valve.

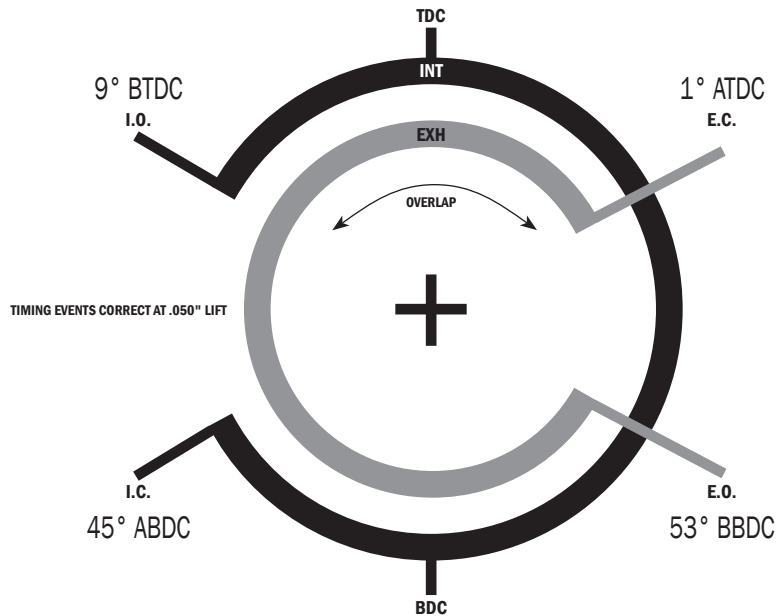

Camshafts damaged by improper installation, excessive spring pressure, valve train bind or retainers contacting valve guides or seals are void from warranty. Not legal for sale or use on emission controlled motor vehicles.



CAMSHAFT TIMING TAG


BC0202/BC0206

Engine: **NISSAN SR20DE(T) - S13 & S14/S15**

	INT	EXH
Advertised Duration:	272°	272°
Duration @ .050" at the lobe:	224°	224°
Valve Lift (inches):	.494"	.494"
Valve Lift (mm):	12.55	12.55
Valve Lash (inches):	.000"	.000"

Recommended Valve Spring: **BC1200**

For best results, install straight up at 0 intake / 0 exhaust and tune from there with adjustable cam sprockets if applicable.
Note: Timing figures below are correct at the valve.

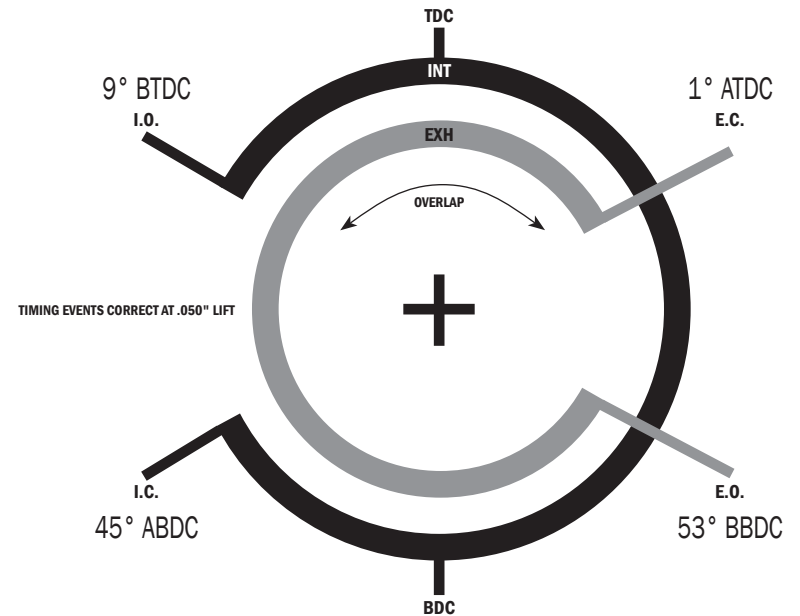

Camshafts damaged by improper installation, excessive spring pressure, valve train bind or retainers contacting valve guides or seals are void from warranty. Not legal for sale or use on emission controlled motor vehicles.