



CAMSHAFT TIMING TAG


BC0212-2

Engine: NISSAN KA24DE (FWD)

	INT	EXH
Advertised Duration:	272°	272°
Duration @ .050":	226°	226°
Valve Lift (inches):	.401"	.401"
Valve Lift (mm):	10.19	10.19
Valve Lash (inches):	.008"	.010"

Recommended Valve Spring: BC0210

Cams are setup for FWD applications. To use on RWD, grind away drive slot to stock specs and swap intake & exhaust cams.

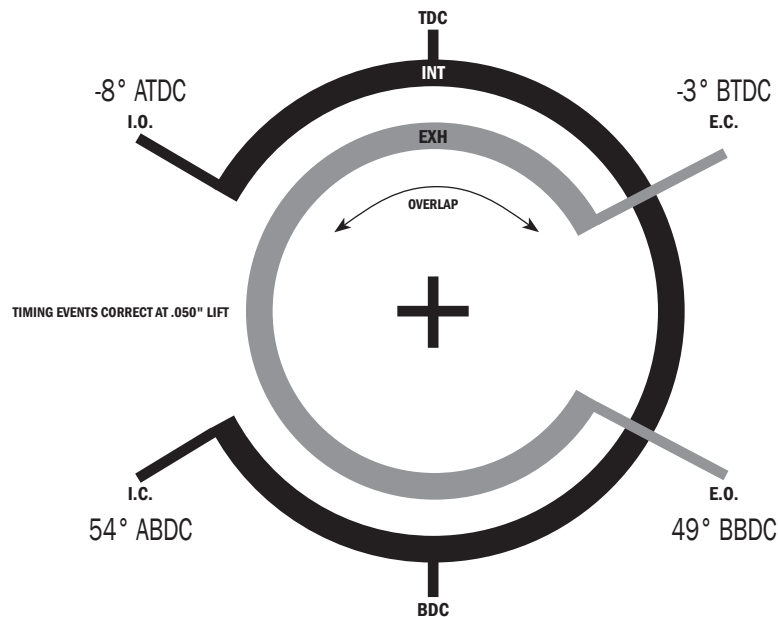

CAMSHAFT TIMING TAG


BC0212-2

Engine: NISSAN KA24DE (FWD)

	INT	EXH
Advertised Duration:	272°	272°
Duration @ .050":	226°	226°
Valve Lift (inches):	.401"	.401"
Valve Lift (mm):	10.19	10.19
Valve Lash (inches):	.008"	.010"

Recommended Valve Spring: BC0210

Cams are setup for FWD applications. To use on RWD, grind away drive slot to stock specs and swap intake & exhaust cams.

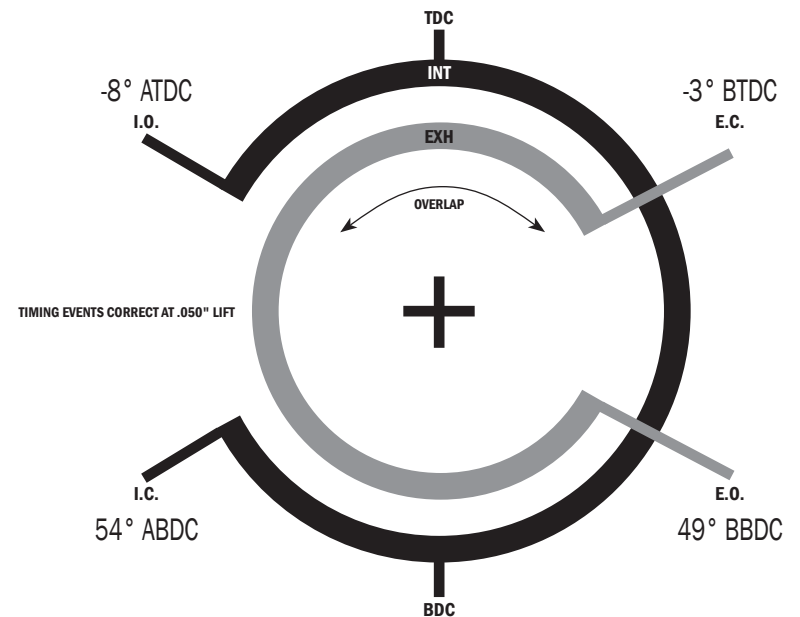

Camshafts damaged by improper installation, excessive spring pressure, valve train bind or retainers contacting valve guides or seals are void from warranty. Not legal for sale or use on emission controlled motor vehicles. Mild clearancing required on the cylinder head to avoid cam lobe interference.

Camshafts damaged by improper installation, excessive spring pressure, valve train bind or retainers contacting valve guides or seals are void from warranty. Not legal for sale or use on emission controlled motor vehicles. Mild clearancing required on the cylinder head to avoid cam lobe interference.