



CAMSHAFT TIMING TAG


BC0212

Engine: NISSAN KA24DE (RWD)

	INT	EXH
Advertised Duration:	272°	272°
Duration @ .050":	226°	226°
Valve Lift (inches):	.401"	.401"
Valve Lift (mm):	10.19	10.19
Valve Lash (inches):	.008"	.010"

Recommended Valve Spring: BC0210

These cams are setup for Rear Wheel Drive (RWD) applications, the drive gear slot has already been removed.

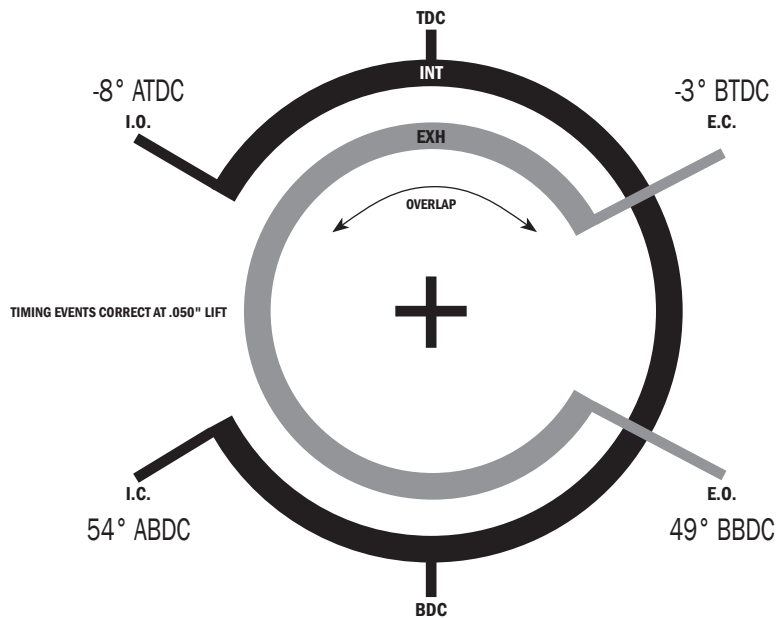

Camshafts damaged by improper installation, excessive spring pressure, valve train bind or retainers contacting valve guides or seals are void from warranty. Not legal for sale or use on emission controlled motor vehicles. Mild clearancing required on the cylinder head to avoid cam lobe interference.



CAMSHAFT TIMING TAG


BC0212

Engine: NISSAN KA24DE (RWD)

	INT	EXH
Advertised Duration:	272°	272°
Duration @ .050":	226°	226°
Valve Lift (inches):	.401"	.401"
Valve Lift (mm):	10.19	10.19
Valve Lash (inches):	.008"	.010"

Recommended Valve Spring: BC0210

These cams are setup for Rear Wheel Drive (RWD) applications, the drive gear slot has already been removed.

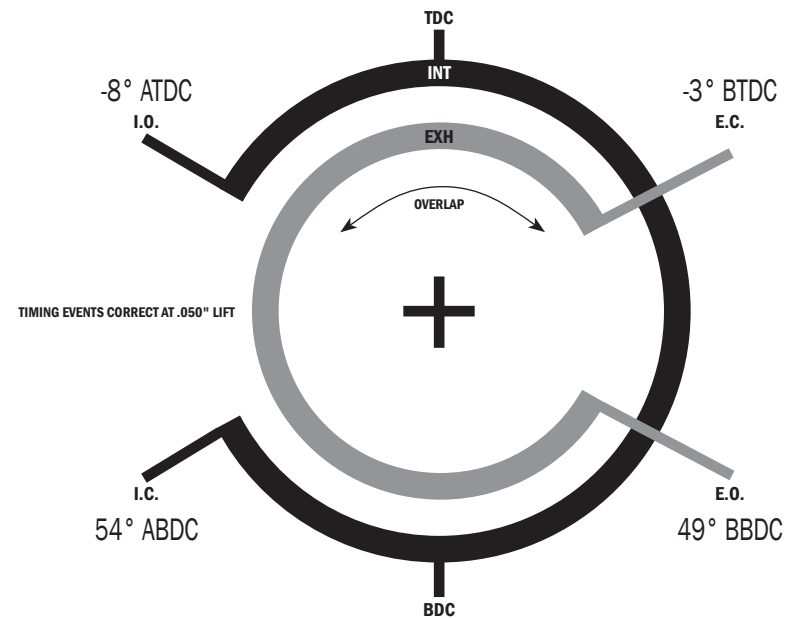

Camshafts damaged by improper installation, excessive spring pressure, valve train bind or retainers contacting valve guides or seals are void from warranty. Not legal for sale or use on emission controlled motor vehicles. Mild clearancing required on the cylinder head to avoid cam lobe interference.