


	INTAKE	EXHAUST
ADVERTISED DURATION	296°	304°
ACTUAL CAM LIFT (in/mm)	.415"	.436"
ROCKER ARM RATIO	1:1	1:1
CENTERLINE	108°	116°
LOBE SEPERATION	112°	
DURATION AT 0.050" CAM	229°	237°
DURATION AT 0.050" VALVE	-	-
VALVE CLEARANCE	.012" COLD	.013" COLD
RECOMMENDED SPRING KIT	BC0355 (Single Spring)	

CAMSHAFT TIMING AT 0.050" VALVE LIFT	OPEN	CLOSES
	INTAKE	11° BTDC
EXHAUST	59° BBDC	7° ATDC

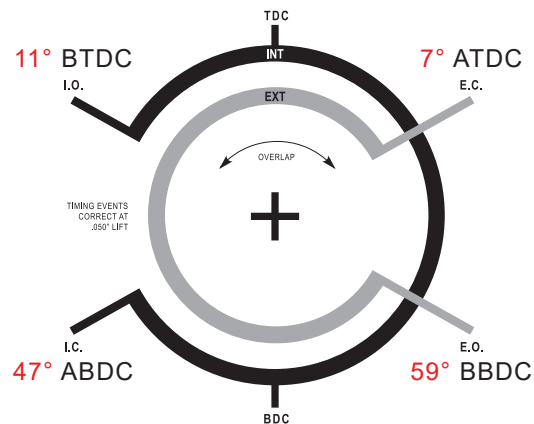

NOTES

NORMALLY ASPIRATED SPEC
Requires BC0250 spring/retainer kit.

BC does not recommend using synthetic oil during break-in or operation. Follow OEM manufacturer's torque sequence and specifications. Use liberal amount of aftermarket engine assembly lube during installation. Check follower or bucket surfaces for abnormal wear and/or scuffing. On initial start-up and break-in run engine at 1500-2500 rpm for 20 minutes. **Camshafts damaged by improper installation, excessive spring pressure or retainers contacting valve guides or seals are void from warranty. Not legal for sale or use on emission controlled motor vehicles.**

