



CAMSHAFT TIMING TAG


BC0056-2

Engine: 8620 STEEL HONDA K20A2/Z3 iVTEC

	INT	EXH
Advertised Duration:	320°	336°
Duration @ .050" (Lobe):	250°	262°
Duration @ .050" (Valve):	268°	280°
Valve Lift (inches):	.598"	.560"
Valve Lift (mm):	15.19	14.22
Valve Lash (inches):	.006"	.008"

Recommended Valve Spring/Retainer Kit: BC0040

Check piston to valve when going max (50°) camshaft advance

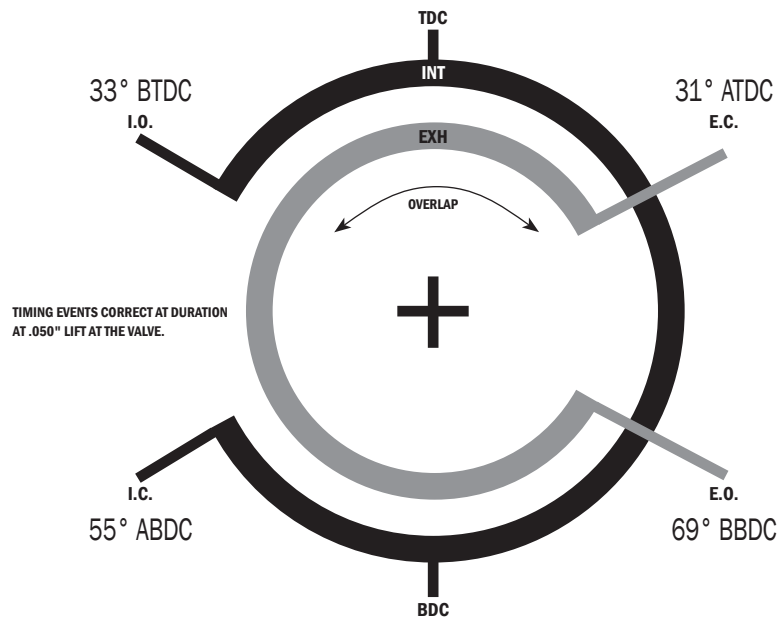

Camshafts damaged by improper installation, excessive spring pressure, valve train bind or retainers contacting valve guides or seals are void from warranty. Not legal for sale or use on emission controlled motor vehicles.



CAMSHAFT TIMING TAG


BC0056-2

Engine: 8620 STEEL HONDA K20A2/Z3 iVTEC

	INT	EXH
Advertised Duration:	320°	336°
Duration @ .050" (Lobe):	250°	262°
Duration @ .050" (Valve):	268°	280°
Valve Lift (inches):	.598"	.560"
Valve Lift (mm):	15.19	14.22
Valve Lash (inches):	.006"	.008"

Recommended Valve Spring/Retainer Kit: BC0040

Check piston to valve when going max (50°) camshaft advance

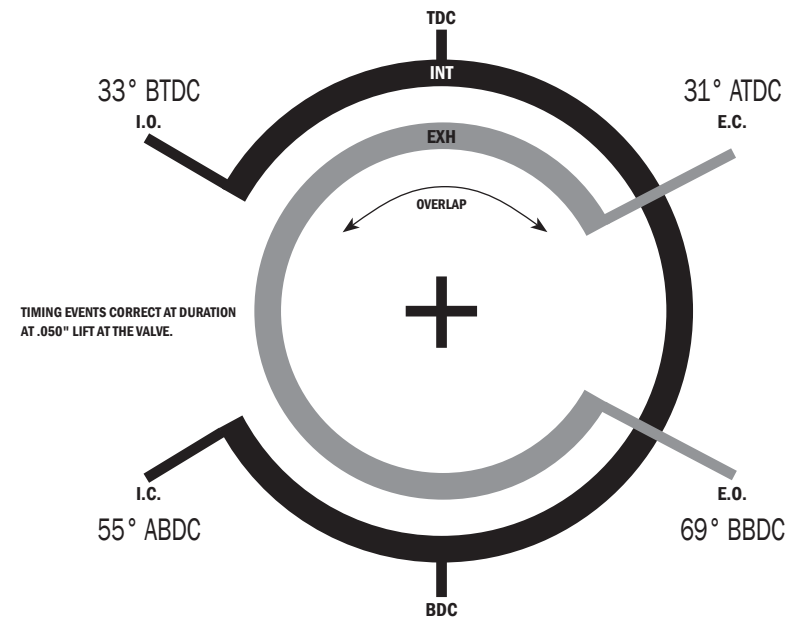

Camshafts damaged by improper installation, excessive spring pressure, valve train bind or retainers contacting valve guides or seals are void from warranty. Not legal for sale or use on emission controlled motor vehicles.