


	INTAKE	EXHAUST
ADVERTISED DURATION	264°	264°
ACTUAL CAM LIFT (in/mm)	.375" / 9.52mm	.375" / 9.52mm
ROCKER ARM RATIO	1:1	1:1
CENTERLINE	121°	118°
LOBE SEPERATION	119.5°	
DURATION AT 0.050" CAM	218°	218°
DURATION AT 0.050" VALVE	218°	218°
VALVE CLEARANCE	.008" / .20mm SOLID	.010" / .22mm SOLID
RECOMMENDED SPRING KIT	BC0210 or BC0210S	

CAMSHAFT TIMING AT 0.050" VALVE LIFT	OPEN	CLOSES
	INTAKE	12° ATDC
EXHAUST	47° BBDC	9° BTDC

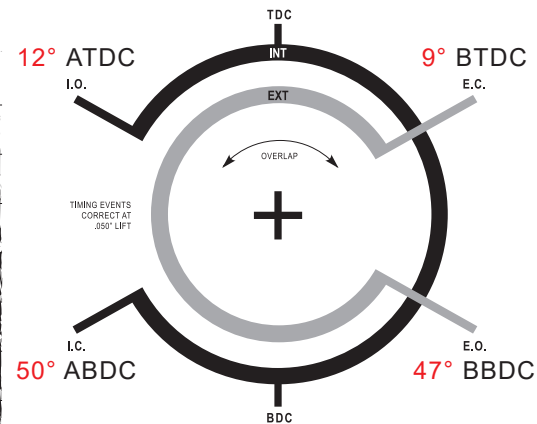

## NOTES

Do not use impact/wrench or gun to torque cam gear to cam.  
Torque cam gear bolt to OEM spec.

BC does not recommend using synthetic oil during break-in or operation. Follow OEM manufacturer's torque sequence and specifications. Use liberal amount of aftermarket engine assembly lube during installation. Check follower or bucket surfaces for abnormal wear and/or scuffing. On initial start-up and break-in run engine at 1500-2500 rpm for 20 minutes. **Camshafts damaged by improper installation, excessive spring pressure or retainers contacting valve guides or seals are void from warranty. Not legal for sale or use on emission controlled motor vehicles.**

